

## N-Male for RG 214 N-C-J214

50 Ω

### Specifications:



Temperature installed:	-40 to +125 [°C]
Working voltage:	max. 1000 [V]
Withstand voltage:	max. 2500 [V]
Frequency range DC:	6 [GHz]
Impedance:	50 [Ω]
Insulation resistance:	≥5000 [MΩ]
Voltage Standing Wave Ratio:	≤1,20

Prod.no: 65450

**RoHS** ✓

### Construction:

<i>Body:</i>	Brass bar
<i>Sender pin:</i>	Brass bar
<i>Insulation:</i>	PFA/PTFE
<i>Thread sleeve:</i>	Brass bar
<i>Snap ring:</i>	Bronze wire
<i>O-ring:</i>	Siliastic

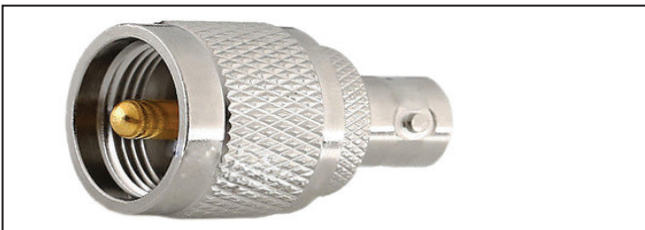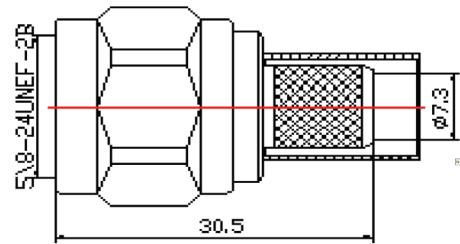

## UHF-connector for RG 214 UHF-C-J214

50 Ω

### Specifications:

Temperature installed:	-40 to +85 [°C]
Working voltage:	max. 1000 [V]
Withstand voltage:	max. 3500 [V]
Frequency range DC:	2 [GHz]
Impedance:	50±5 [Ω]
Insulation resistance:	≥5000 [MΩ]
Voltage Standing Wave Ratio:	≤1,30

Prod.no: 65451

**RoHS** ✓

### Construction:

<i>Body:</i>	Brass bar
<i>Sender pin:</i>	Brass bar
<i>Insulation:</i>	PFA/PTFE
<i>Connecting sleeve:</i>	Brass bar
<i>Snap ring:</i>	Bronze wire

