

UHF N-Male for RG 213

J213

IP67

50Ω

Application:


Straight N Male connector for RG 213 coaxial cables.
Waterproof acc. to IP67

Specifications:

Temperature range:	-40 to +85 [°C]
Insulation resistance:	≥ 5000 [MΩ]
Frequency range DC:	≈ 300 [MHz]
Impedance:	50 [Ω]
Voltage:	750 [V max]
Testvoltage	2000 [V max]
Durability:	≥ 500 [Cycles]

Construction:

<i>Center contact:</i>	Brass bar (Cu/Ep Ni)
<i>Body:</i>	Brass bar (Cu/Ep Ni)
<i>Socket:</i>	Beryllium (Cu/Ep Au)
<i>Insulator:</i>	PTFE
<i>Crimping suite:</i>	Copper alloy (Cu/Ep Ni)

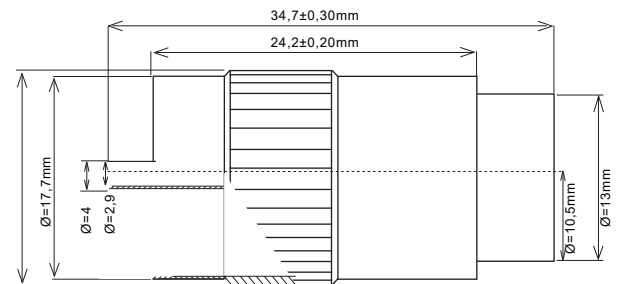

Prod.no: 65452

RoHS ✓